

# WHITLAM/PLUMB-PRO

## PVC Pipe Wrapping Tape

This tape consists of a stabilized, plasticized PVC film coated with a non-corrosion pressure sensitive adhesive. It is moisture resistant, anti-corrosive and has outstanding conformability and adhesion to metal and plastic.

### #143 - 10 mil x 2" x 100'

**Thickness:** 10 mil (0.25)

**Tensile Strength:** 25 lbs/in (43.8 N/10mm)\*

**Elongation at Break:** 200%


**Adhesion to Steel:** 20 oz/in (2.4 N/10mm)\*

**Adhesion to Backing:** 20 oz/in (2.4 N/10mm)\*

**Dielectric Strength:** 1250 Volts/mil

**Temperature Range:** -7°C to 80°C

\*Force N (Newton) = kg x m/s<sup>2</sup>

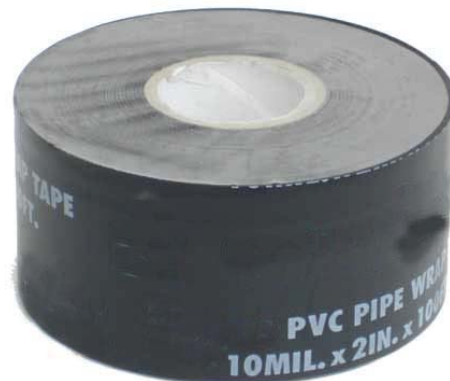

The physical and performance properties shown are averages obtained from tests recommended by ASTM D-1000, or our own procedures. A particular roll may vary slightly from these averages and it is recommended that the buyer determine the suitability for his own purposes.

**J.C. Whitlam Manufacturing Co.**

P.O. Box 380 • Wadsworth, Ohio 44282

**U.S. & Canada**

Phone: 800-321-8358

Fax: 800-537-0588

**International**

Phone: 330-334-2524

Fax: 330-334-3005

