

# TALON™Professional Grade PTFE Tape

**TALON**<sup>™</sup> **PTFE TAPE** is a Heavy Mil and High Density Tape that offers Freedom from Leaks<sup>™</sup> virtually on all types of threaded connections.

Each size comes in a 1429 inch roll (36.3 m). TALON<sup>™</sup> PTFE TAPE is suitable for any threaded pipe carrying dilute acids, compressed air, aliphatic solvents, dilute caustics, cutting oils, diesel fuel oil, hydraulic fluids, L.P. Gas, natural gas, petroleum solvents, steam, vegetable oils,

## Seals threads on many threaded connections including:

- **Stainless Steel**
- **Cast Iron**
- **PVC, CPVC, and ABS Fittings**
- **Brass and Chrome**

SIONAL HIGH DENSITY PTFE' TAPE

WHITLAM


**Gas Systems** 





1429 Inch (36.3 m) Long Roll.

50% More Tape than the Leading Brand!

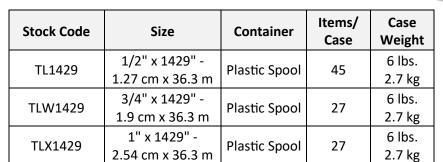

Distributed By:

PTFE = PolyTetraFluoroEthylene



#### FOR USE ON THREADED:

ABS, PVC, CPVC, Delrin\*, Zytel\*, FlowGuard Gold\*\* CPVC, Blazemaster\*\* CPVC, Fiberglass, Nylon, Polypropylene, Polybutylene, Polyethylene, Celcon\*\*\* Cycolac\*\*\*\*, and all types of

### PRESSURE RANGE USE:

Gases:

Up to 3,000 PSI (210.9 Kg/cm²) Liquids:

Up to 10,000 PSI (703.0

**TENSILE STRENGTH** LOGITUDINAL

15N / mm<sup>2</sup>

**ELONGATION** 

>100%

**THICKNESS** 

.0035" ± 10%

**SPECIFIC GRAVITY** 0.8 g/cm<sup>3</sup>

**U.S. FEDERAL SPECIFICATIONS** 

**TALON TAPE** Meets MIL-T-27730A

#### **AVAILABLE SIZES**

Stock# TL1429

1/2" x 1429" TLW1429 3/4" x 1429" TLX1429 1" x 1429"

\*Dupont registered trademark

\*\* FlowGuard GOLD and Blazemaster are registered trademarks of The Lubrizol Corporation.

\*\*Celanese registered trademark

\*\*\*\*General Electric Plastics registered trademark

J.C. Whitlam Manufacturing Co. P.O. Box 380 • Wadsworth, OH 44282

U.S. & Canada

Phone: 800-321-8358 FAX: 800-537-0588 International

Phone: 330-334-2524 FAX: 330-334-3005

www.TalonPTFE.com