




TALON™

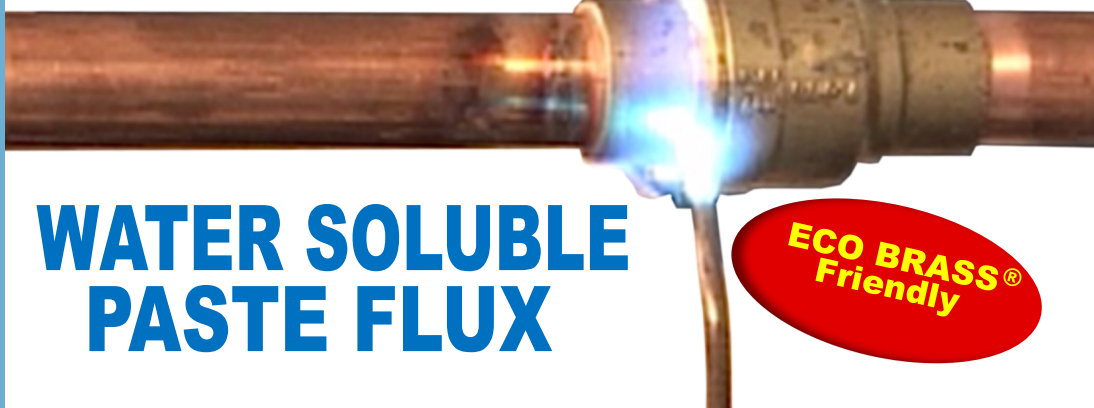

WATER SOLUBLE PASTE FLUX

**ECO BRASS®
Friendly**

USAGE:

Solder Flux for use with 95/5, 60/40, 50/50, 40/60 and Lead Free Solders on Copper, Lead Free Copper Alloys, Brass, Performance Bronze™ alloy*, Silicon Bronze, Galvanized Iron, Tin, Steel, Terne Plate, Zinc, Silver, Nickel and Sheet Lead.

TEMPERATURE RANGE

Freezing Temperature:

14°F (-10°C)

Melting Temperature:

140°F (60°C)

COLOR/CONSISTENCY

White / Paste

AMERICAN SOCIETY FOR TESTING AND MATERIALS SPECIFICATION

Meets ASTM B-813

AVAILABLE SIZES

Stock#	Size
TWF2	2 oz. (57 g)
TWF4	4 oz. (113.4 g)
TW8BT*	8 oz. (227 g)
	*(brush top cap)
TWF1	1 lb. (454 g)

J.C. Whitlam Manufacturing Co.
P.O. Box 380 • Wadsworth, OH 44282

U.S. & Canada

Phone: 800-321-8358

FAX: 800-537-0588

International

Phone: 330-334-2524

FAX: 330-334-3005

www.joinpipe.com


© 2025 J.C. Whitlam Manufacturing Co.

TALON™ Water Soluble Paste Flux is a completely water soluble/flushable, acid free, lead free, self-cleaning flux that is suitable on all types of tin solder and their alloys. Its self-cleaning action will solder dissimilar metals and works excellent on older or tarnished copper without having to brush or sand the surface. Leaves no residue and will not transfer taste or odor in water coolers and potable water systems. **TALON™** Water Soluble Paste Flux withstands overheating by retaining the flux in the area of the joint being soldered. Meets ASTM B-813.

- **ECO BRASS® Friendly**
- **Meets ASTM B-813**
- **Self Cleaning**
- **Lead Free**
- **Non-Corrosive, Non-Fuming**



Stock#	Size	Qty/ Case
TWF2	2 oz.	36
TWF4	4 oz.	24
TW8BT	8 oz.	24
TWF1	1 lb.	24

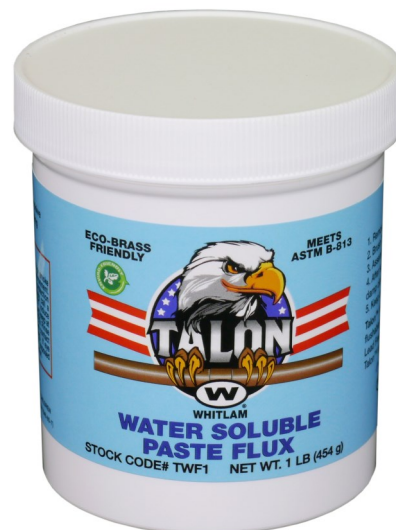

Distributed By:

W WHITLAM
The Industry Standard for Over 100 Years

*Trademark of NIBCO INC. ECO BRASS® is a registered trademark of Mitsubishi Shindoh