

RUGGEDCUT LIGHT CUTTING AND THREADING OIL RL-SPEC

PRODUCT DESCRIPTION

PRODUCT

RUGGEDCUT Light Cutting and Threading Oil

TYPE

RUGGEDCUT Light Cutting and Threading Oil is a lard base cutting and threading oil containing a high percentage of active sulphur content. Absorbs and throws off heat generated by friction in machining metal or cutting threads. Reduces friction and prevents galling. Cools the cutting teeth of the dies therefore increasing tool and die life. Produces a smooth cut finish.

The transparent oil allows an unobstructed view of the metal being cut or threaded.

RUGGEDCUT Light Cutting and Threading Oil is formulated to prevent chip welding and prolong tool and die life at high or low speeds by reducing frictional heat and tool wear, as well as power consumption. It also improves surface finish and pushes away metal filings and chips.

Rust and corrosion protection of the metal is also provided.

RECOMMENDED USES

RUGGEDCUT Light Cutting and Threading Oil is recommended for tough machining operations such as threading and tapping, broaching, and for alloys that are difficult to machine.

COLOR/CONSISTENCY

Transparent Light Brown Oil

FLASH POINT, COC

390°F (198°C)

POUR POINT

+15°F (-9°C)

SPECIFIC GRAVITY° API

26.8

VISCOSITY cSt AT 40°C

32.3

RL-SPEC

© 2005 J.C. Whitlam Manufacturing Company
This product is manufactured in the U.S.A.

ENVIRONMENTAL STATEMENT

RUGGEDCUT Light Cutting and Threading Oil is formulated to be nonhazardous to the skin and inhibits growth of all germs and infectious organisms within the oil.

RUGGEDCUT Light Cutting and Threading Oil is free of toxic ingredients, such as poly chlorinated biphenyls and poly nuclear aromatic compounds.

SEE MATERIAL SAFETY DATA SHEET (MSDS) FOR COMPLETE PRECAUTIONS FOR SAFE HANDLING AND USE.

PACKAGING

U.S. Measure:

| Stock Code | Size |
|-----------------------------|------------------|
| RL32 | 1 quart (.95 L) |
| RL1 | 1 gal. (3.785 L) |
| Pail w/Handle | |
| RL5 | 5 gal. (18.9 L) |
| 55 Gallon Steel Drum | |
| RL55 | 55 gal. (208 L) |

WEIGHT PER U.S. GALLON


7.6 lbs. (3.5 kg) ± 0.2

SHIPPING WEIGHT PER CASE


| Stock# | Case Weight | #/Case |
|--------|---------------------|---------|
| RL32 | 27 lbs. (12.2 kg) | 12/case |
| RL1 | 48 lbs. (21.8 kg) | 6/case |
| RL5 | 39 lbs. (17.7 kg) | 1 each |
| RL55 | 454 lbs. (205.9 kg) | 1 each |

DIRECTIONS FOR USE

1. Start the flow of oil before dies are in contact with the pipe.
2. Flood the area being cut or threaded to insure against occasional dry cutting periods. Failure to keep surface oiled can result in damage to cutting tools and grinding wheels.
3. Keep the flow of oil on the work zone until the operation of cutting or threading is complete.



CORRECT
Showing the correct manner in which cutting fluids should be applied to the tool and work in order that best results may be accomplished.

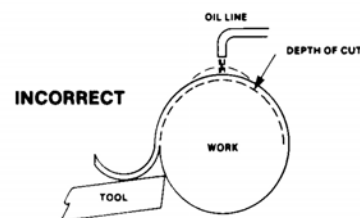

INCORRECT
When oil is applied in this manner, it can neither cool nor lubricate tool or work with any degree of satisfaction.

NOTE: All Whitlam Cutting and Threading Oils are nonsmoking and non fogging. Smoking or fogging of any Whitlam Cutting and Threading Oils can only occur if the fluid is overheated due to inadequate or misdirected oil flow.

 **WHITLAM**
PLUMB-PRO
The Industry Standard for Over 100 Years

Division of
J.C. Whitlam Mfg. Company
P.O. Box 380
Wadsworth, Ohio 44282
Phone: 330-334-2524
Fax: 330-334-3005
email: info@jcwhitlam.com
website: www.jcwhitlam.com