


WHITLAM



For a
"Positive Leak Proof Seal"
 on All Types of Threaded
 Connections
 Including Natural Gas

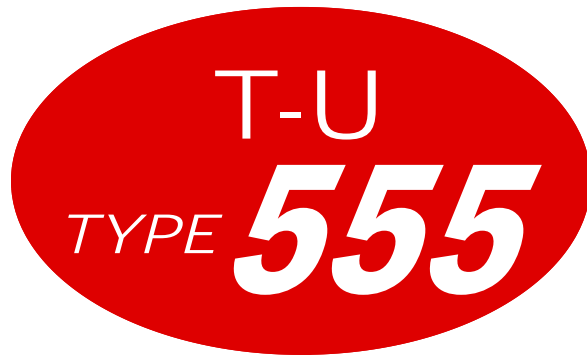

CSA Approved
 for Natural Gas

NSF Standard 14
 NSF Standard 61

FOR USE ON THREADED:

ABS, PVC, CPVC, Delrin*, Zytel*, FlowGuard GOLD** CPVC, Blazemaster** CPVC, Fiberglass, Nylon, Polypropylene, Polybutylene, Polyethylene, Celcon***, Cicolac****, and all types of metal.

PRESSURE RANGE USE:

Gases:

Up to 3,000 PSI (435 kPa)

Liquids:

Up to 6,000 PSI (870 kPa)

Available Sizes:

Stock #	Size
TU4	¼ pint (118 ml)
TU8	½ pint (237 ml)
TU16	1 pint (473 ml)
TU32	1 quart (.95 L)
TU1	1 gal. (3.785 L)
TU5	5 gal. (18.9 L)
TU55	55 gal. (208 L)

T-U TYPE 555 Thread Sealing Compound

T-U TYPE 555 is a yellow soft-set, odor free all purpose, non-seizing, thread sealing compound that produces a leakproof seal on all types of metal and plastic threaded connections.

T-U TYPE 555 is completely homogenized and free of any valve destroying grit.

- Non-Separating
- Grit Free
- -50°F to +400°F Temp. Range
- Adheres to Oily Threads
- Easy Cleanup
- Safe for PVC & CPVC
- Non-Toxic
- Non Combustible

Suitable for use on systems carrying:

Acids, Dilute	Coal Tar Naphtha	Hydrogen	Petroleum
Air, Compressed	Cutting Oils	Inert Gases	Solvents
Alkalis, Dilute	Diesel Fuel Oil	Jet Fuel	Propane
Ammonia	Freons (All)	Kerosene	Refrigeration
Aliphatic Solvents	Gasoline	Lacquer	Gases
Brine	Glycol	L P Gases	Soap, Liquid
Butane	Heating Oils	Mineral Oils	Steam Lines
Carbon Dioxide	Helium, Gaseous	Natural Gas	Sugar, Liquid
Castor Oils	Hydraulic Oils	Nitrogen Gas	Vegetable Oils
Chlorinated Water			Water



In U.S. & Canada
 Phone: 800-321-8358
 FAX: 800-537-0588
 International
 Phone: 330-334-2524
www.jcwhitlam.com

*Dupont registered trademark

**FlowGuard GOLD and Blazemaster are B.F. Goodrich registered trademarks

***Celanese registered trademark

****General Electric Plastics registered trademark