

ALL WEATHER CEMENT



WHITLAM WEATHERPROOF ONE-STEP LOW VOC* MEDIUM BODIED PVC CEMENT

USAGE:

All classes of PVC solvent weld pipe and fittings.

PIPE SIZE:

Pressure Pipe: Up to 6" (15.24 cm)
Non-Pressure: Up to 8" (20.32 cm)

PRESSURE RANGE USE:

Liquids:
Up to 300 PSI (2068 kPa)

TEMPERATURE RANGE Use:

-20°F (-29°C) to 120°F (49°C)

CONSISTENCY/COLOR:

Medium Bodied Clear or Blue Color

SET TIME:

20 seconds

COMPLETE CURE TIME:

24 Hours

SPECIFICATIONS:

Meets ASTM D2564 and
ASTM F3328-18

AVAILABLE SIZES:

Blue

Stock#	Size
WET4	¼ pint (118 ml)
WET8	½ pint (237 ml)
WET16	1 pint (473 ml)
WET32	1 quart (.95 L)
WET1-CGW	1 gal. (3.785 L)


Clear

PCW4	¼ pint (118 ml)
PCW8	½ pint (237 ml)
PCW16	1 pint (473 ml)
PCW32	1 quart (.95 L)
PCW1-CGW	1 gal. (3.785 L)

Blue



Clear

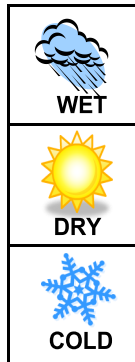

NSF Standard 14
NSF Standard 61

**HOT WELD
CEMENT**

- **Fast Set, One-Step Cement**
- **Suitable for All Weather Conditions**
- **No Primer Required****
- **Works Well on Wet or Dry Pipe**
- **Great for Flexible PVC Pipe**
- **Allows for Immediate Pressure Testing**

This solvent cement is suitable to be used as a One-Step Cement for joining PVC Drain, Waste and Vent (DWV) pipe and fittings in non-pressure applications in sizes up to and including 4 inches where acceptable by local code.

J.C. Whitlam Manufacturing Co.
P.O. Box 380 • Wadsworth, OH 44282
U.S. & Canada

Phone: 800-321-8358
FAX: 800-537-0588

International

Phone: 330-334-2524
FAX: 330-334-3005

www.PVC-CEMENT.com



© 2023 J.C. Whitlam Manufacturing Co.

Distributed By:



WHITLAM

The Industry Standard for Over 100 Years

*Maximum VOC emissions as applied and tested per SCAQMD
Rule 1168, Test Method 316A: less than 510 g/l
**Use without primer when acceptable by local code.