

# ALL WEATHER CEMENT



## WHITLAM WEATHERPROOF ONE-STEP LOW VOC\* MEDIUM BODIED PVC CEMENT

### USAGE:

All classes of PVC solvent weld pipe and fittings.

### PIPE SIZE:

Pressure Pipe: Up to 6" (15.24 cm)  
Non-Pressure: Up to 8" (20.32 cm)

### PRESSURE RANGE USE:

Liquids:  
Up to 300 PSI (2068 kPa)

### TEMPERATURE RANGE Use:

-0°F (-18°C) to 120°F (49°C)

### CONSISTENCY/COLOR:

Medium Bodied Clear or Blue Color

### SET TIME:

20 seconds

### COMPLETE CURE TIME:

24 Hours

### SPECIFICATIONS:

Meets ASTM D2564 and  
ASTM F3328-18

### AVAILABLE SIZES:


#### Blue

Stock#	Size
WET4	¼ pint (118 ml)
WET8	½ pint (237 ml)
WET16	1 pint (473 ml)
WET32	1 quart (.95 L)
WET1	1 gal. (3.785 L)

#### Clear

PCW4	¼ pint (118 ml)
PCW8	½ pint (237 ml)
PCW16	1 pint (473 ml)
PCW32	1 quart (.95 L)
PCW1	1 gal. (3.785 L)

Blue

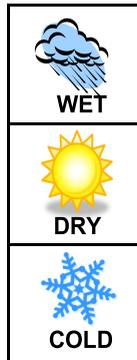

Clear



- **Fast Set, One-Step Cement**
- **Suitable for All Weather Conditions**
- **No Primer Required\*\***
- **Works Well on Wet or Dry Pipe**
- **Great for Flexible PVC Pipe**
- **Allows for Immediate Pressure Testing**

This solvent cement is suitable to be used as a One-Step Cement for joining PVC Drain, Waste and Vent (DWV) pipe and fittings in non-pressure applications in sizes up to and including 4 inches where acceptable by local code.

J.C. Whitlam Manufacturing Co.  
P.O. Box 380 • Wadsworth, OH 44282

U.S. & Canada

Phone: 800-321-8358

FAX: 800-537-0588

International

Phone: 330-334-2524

FAX: 330-334-3005

[www.PVC-CEMENT.com](http://www.PVC-CEMENT.com)



© 2025 J.C. Whitlam Manufacturing Co.

Distributed By:



 **WHITLAM**

The Industry Standard for Over 100 Years

\*Maximum VOC emissions as applied and tested per SCAQMD Rule 1168, Test Method 316A: less than 425 g/l

\*\*Use without primer when acceptable by local code.