


WHITLAM

SHARK-BITE

PVC CEMENT AQUA BLUE LOW VOC MEDIUM-BODIED FAST SET

*For a PVC Solvent Weld That
Bites Like A Shark!*

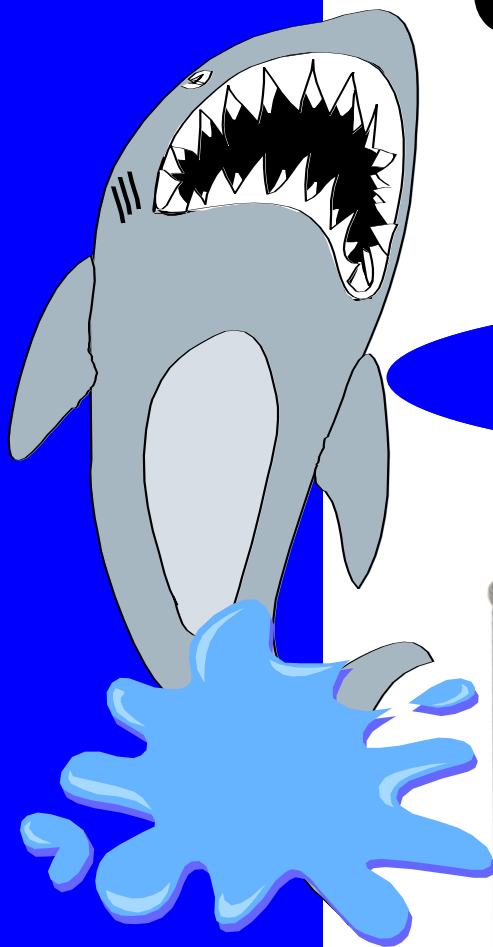

- Ideal for Pool/Spa Installations/Repair
- Fast Set
- One Step Cement
- Low V.O.C.* Formula
- No Primer Required**
- Works Well on Wet Pipe
- Great for Flexible PVC
- Allows for Immediate Pressure Testing

SHARK-BITE SPECIFICATIONS

USAGE: To solvent weld all classes of PVC pressure and non-pressure solvent weld pipe and fittings.

AVAILABLE IN: 4 oz. (118 ml), 16 oz. (473 ml), 32 oz. (.95 L), and 1 Gallon (3.785 L)

PIPE SIZE: Up to 3" (7.62 cm) diameter for pressure pipe and 6" (15.24) diameter for non-pressure.

LIQUID PRESSURE RANGE: Up TO 300 P.S.I. (43 kPa)

CEMENT COLOR: Aqua Blue which fades to clear when exposed to sunlight.

TEMPERATURE RANGE: Best if used at temperatures between 0°F (-17°C) and 100°F (38°C).

CONSISTENCY: Medium Bodied

PARTIAL SET TIME RATING: Fast - approximately 20 seconds

COMPLETE CURE TIME: 24 Hours

SPECIFICATIONS: Meets ASTM specification D2564 and ASTM F3328-18

J.C. Whitlam Manufacturing Co.

P.O. Box 380 • Wadsworth, Ohio 44282

U.S. & Canada

Phone: 800-321-8358

Fax: 800-537-0588

International

Phone: +1-330-334-2524

Fax: +1-330-334-3005

* Emits less than 425 grams per liter VOC when tested according to SCAQMD method 316A.

** Use without Primer when acceptable by local code



WHITLAM

www.joinpipe.com