

# PLUMB-PRO®

## Utility Straps

### Black EPDM Rubber Utility Straps



| Stock Code | Size         | Items per Case |
|------------|--------------|----------------|
| #US9       | 9" (23 cm)   | 50             |
| #US9A      | 9" (23 cm)   | 12             |
| #US15      | 15" (38 cm)  | 50             |
| #US15A     | 15" (38 cm)  | 12             |
| #US20      | 20" (51 cm)  | 50             |
| #US20A     | 20" (51 cm)  | 12             |
| #US31      | 31" (79 cm)  | 50             |
| #US31A     | 31" (79 cm)  | 12             |
| #US41      | 41" (104 cm) | 50             |
| #US41A     | 41" (104 cm) | 12             |

#### CAUTION:

Always wear safety glasses during tie down and disconnect. Failure to do so may result in serious injury. Inspect strap and hooks before each use - do not use if damaged. Do not use as a primary tie down device for load. Max safe stretch = 150% Strap Length.

**J.C. Whitlam Manufacturing Co.**  
P.O. Box 380 • Wadsworth, Ohio 44282

**U.S. & Canada**

Phone: 800-321-8358


Fax: 800-537-0588

**International**

Phone: 330-334-2524

Fax: 330-334-3005

- **High Quality UV Resistant EPDM Rubber**
- **Squared Head and Tapered Neck Reduces Strap Stress**
- **Rubber Polymer has a High Crosslink Density**
- **Fully Assembled with "S" Hooks Attached**
- **Made in the U.S.A.**

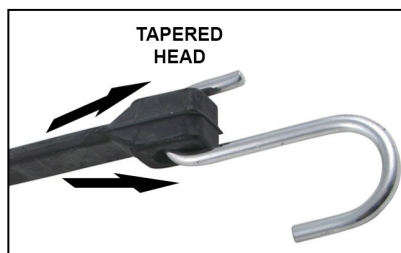

The strap is specifically engineered to absorb stress through a taper where the square head meets the body of the strap. The single piece molded construction ensures exceptional strength and stretch resiliency. The square head also provides a stronger point of contact with the S-Hook, the point where most strap failures occur.

**Distributed by:**

These straps are compliant with the California Prop 65 and TSCA when they are used in the proper operation. However, if parts are heated beyond its limit or are ground up, exposure to chemicals on the list is possible.

 **WHITLAM**  
The Industry Standard for Over 125 Years