


# WHITLAM

# SHARK-BITE

## PVC CEMENT

## AQUA BLUE LOW VOC MEDIUM-BODIED FAST SET

*For a PVC Solvent Weld That  
Bites Like A Shark!*

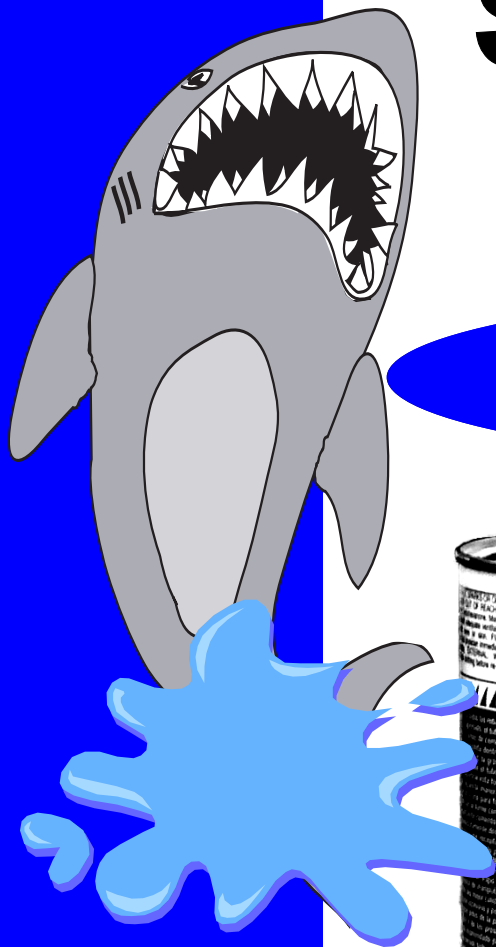

- Ideal for Pool/Spa Installations/Repair
- Fast Set
- One Step Cement
- Low V.O.C.\* Formula
- No Primer Required\*\*
- Works Well on Wet Pipe
- Great for Flexible PVC
- Allows for Immediate Pressure Testing

## SHARK-BITE SPECIFICATIONS

**USAGE:** To solvent weld all classes of PVC pressure and non-pressure solvent weld pipe and fittings.

**AVAILABLE IN:** 4 oz. (118 ml), 16 oz. (473 ml), 32 oz. (.95 L), and 1 Gallon (3.785 L)

**PIPE SIZE:** Up to 3" (7.62 cm) diameter for pressure pipe and 6" (15.24) diameter for non-pressure.

**LIQUID PRESSURE RANGE:** Up TO 300 P.S.I. (43 kPa)

**CEMENT COLOR:** Aqua Blue which fades to clear when exposed to sunlight.

**TEMPERATURE RANGE:** Best if used at temperatures between 0°F (-17°C) and 100°F (38°C).

**CONSISTENCY:** Medium Bodied

**PARTIAL SET TIME RATING:** Fast - approximately 20 seconds

**COMPLETE CURE TIME:** 24 Hours

**CONTAINER LABEL COLOR:** Steel Blue

**SPECIFICATIONS:** Meets ASTM specification D2564

\* Emits less than 250 grams per liter VOC when tested according to SCAQMD method 316A.

\*\* Use without Primer when acceptable by local code

**J.C. Whitlam  
Manufacturing Co.**  
P.O. Box 380  
Wadsworth, Ohio  
44282

**U.S. & Canada**  
Phone: 800-321-8358  
Fax: 800-537-0588

**International**  
Phone: 330-334-2524  
Fax: 330-334-3005

 **WHITLAM**  
**PLUMB-PRO**  
The Industry Standard for Over 100 Years

[www.whitlam-plumbpro.com](http://www.whitlam-plumbpro.com)